

FL-111B SPECIFICATIONS

Fault Definitions:


- Open..... A condition where a single conductor has no continuity from one end to the other.
- Metallic Short..... Two conductors without insulation or a conductor and a shield which physically come into contact with one another.
- High Voltage Short Two conductors or a conductor and a shield which have no insulation between them but do not contact one another. This condition is detected with a high voltage arc that occurs at a rate of about 1 per second.

Equipment Accuracy*:

- Opens and Metallic Shorts..... 0.1% of total cable length.
- High Voltage Shorts..... Better than 1% of total cable length.



*dependent on accuracy of actual cable footage and product uniformity.

- Voltage Test Range 0-20KV D.C.
- Voltage Display 0-20KV analog meter with mirrored scale, accuracy +/- 3% of full scale.
- Output Current..... 5 ma. maximum.
- Detector Sensitivity Better than 1 microvolt.
- Cable Loop Resistance
(Metallic Short) 50 milliohms minimum.
- Dimensions:
FL-111B..... 22.0"W x 14.0"D x 12.3"H (558 mm W x 356 mm D x 311 mm H).
- Test Leads..... 10' standard, 20 ft. available.
- Weight 40.5 lbs. (18.4 kg.).
- Power Requirements 120VAC 2 amps 50/60 Hz. or 240VAC 1 amp 50/60 Hz.


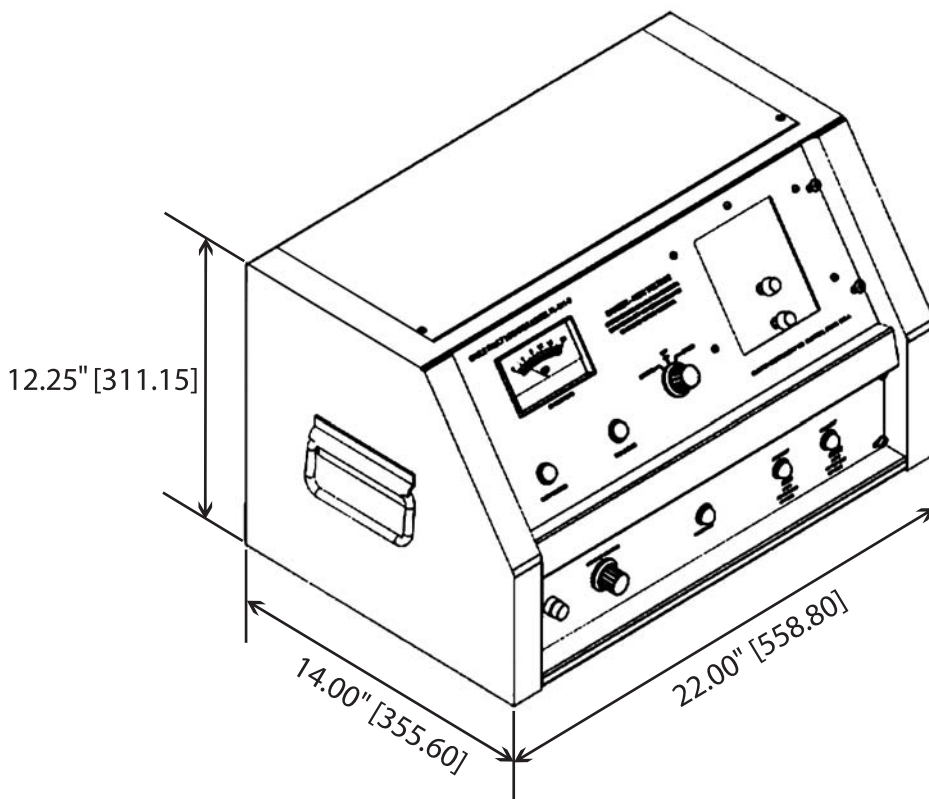


Typical Lead Connections

Opens

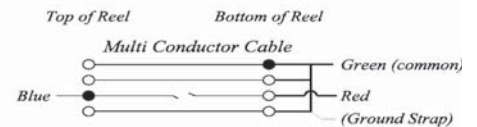

Shorts

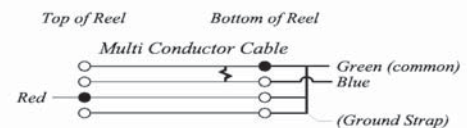

Clinton
INSTRUMENT COMPANY

295 East Main St. • Clinton, CT 06413 USA • Tel: 860.669.7548 • Fax: 860.669.3825 • www.clintoninstrument.com

Specifications subject to change without notice. 10/04 EN